




Barrier gates

LIMIT 500 DUAL

24V Electromechanical barrier raising systems with encoder for residential, industrial or public use. For entrance up to 5 meters




TECHNICAL CHARACTERISTICS

Electrical information	24V
Power supply	230 VAC
Operating power supply	24 VDC
Power consumption	150 W
Current input	6,2 A
Torque	100 Nm
Duty cycle	intensive use
Protection rating (IP)	IP44
Insulation class	2
Working temperature	-20°C / +50°C

ARTICLE	COLOUR	CODE	DESCRIPTION	PACKAGE	WEIGHT	PALETTE
■ LIMIT 500 24V	■	GLT050EEL0R00	Barriera built-in control board 24V For entrance up to 5 m	1 pcs.	65 kg	6

BAR ASSEMBLY AND SPRING CHOICE	LENGTH							
	1,50	2,00	2,50	3,00	3,50	4,00	4,50	5,00
Bar	●	●	●	●	●	●	●	●
Bar with bar cover kit	●	●	●	●	●	●	●	●
Bar with bar cover kit and lights	●	●	●	●	●	●	●	●
Bar with swing down support	●	●	●	●	●	●	●	●
Bar with bar cover kit and swing down support	●	●	●	●	●	●	●	●
Bar with bar cover kit, led and swing down support	●	●	●	●	●	●	●	●
Bar with curtain	●	●	●	●	●	●	●	●
Bar with upper bar cover and curtain	●	●	●	●	●	●	●	●
Bar with upper bar cover, led and curtain	●	●	●	●	●	●	●	●
Bar with upper bar cover, led, curtain and swing down support	●	●	●	●	●	●	●	●

● Small spring AC 530 ● Medium spring AC 540

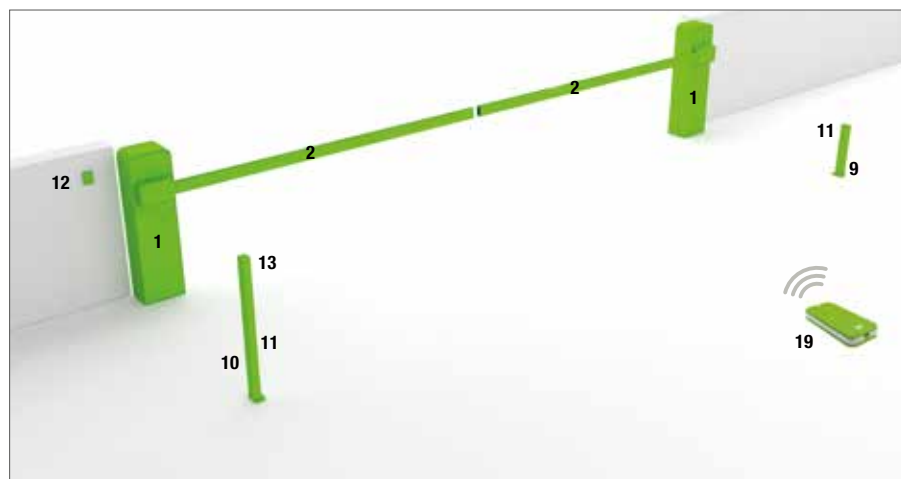

INSTALLATION CHART

1	2 LIMIT 500 - GLT050EEL0R00 Barrier 24V built-in control board
2	2 AC 650 - 5 m - GLTBAR5000W00 Aluminium rectangular bar, RAL 9010
3	2 AC 500 - GLTANCHOR000 Foundation kit
4	2 AC 540 - GLTSPRINGHG00 Spring for light bar
5	2 AC 690 - GLTTOPP500R00 Red barrier bar cover, 5 m
6	2 AC 570 - GLTSUPPORTG00 Swing down support mobile
7	2 AC 700 - GLTSTOPPERW00 Bar end plug
8	2 AC 710 - GLTPLUG010W00 Bar end plug
9	1 MAST 50 - GMAST005NOG00 Extruded aluminium column h 50 cm
10	1 MAST TWIN 100 - GMAST005NOG00 Extruded aluminium column h 1 meter for photocells and control accessories installation
11	2 DART - GDARTSTNOB00 Photocells
12	1 INDEX - GINDEXSTNOB00 Key operated switch
13	1 TACT RADIO - GTACTRADNOB00 Digital switch with radio-controller keypad
14	1 AC-50 - GBATTERYLOG00 Battery kit
15	4 AC 800 - GLTLED5000W00 5 m LED strip
16	2 AC 770 - GLTSWIFTNOG00 Internal LED lights
17	2 AC 660 - GLTSTRIP00W00 Reflective adhesive strips
18	1 AC-40 - GSAFETYNOG00 Signage table
19	1 KEEP 2 RC - GKEEP2STNOB00 Remote control, rolling code 2 ch.

LIMIT 500 DUAL

ACCESSORIES from page 198 to 205



Outdoor antenna
AC 30 / GANTENNANO000



Foundation kit
AC 500 / GLTANCHORO000



Spring for light bar
AC 530 (light) / GLTSPRINGMG00
AC 540 (medium) / GLTSPRINGHG00



Aluminium rectangular bar, RAL 9010
AC 630 - 3m / GLTBAR3000W00
AC 640 - 4m / GLTBAR4000W00
AC 650 - 5m / GLTBAR5000W00



Bar end plug
AC 700 / GLTSTOPPERW00



Bar end plug
AC 715 / GLTPLUG020W00



Bar end plug
AC 710 / GLTPLUG010W00



Red barrier bar cover
AC 670 - 3m / GLTTOPP300R00
AC 680 - 4m / GLTTOPP400R00
AC 690 - 5m / GLTTOPP500R00



90° jointed rod
AC 580 / GLTANG9000G00



Swing down support for bar
AC 570 / GLTSUPPORTG00

Barrier gates

CONTROL ACCESSORIES from page 208 to 243



Battery kit
AC 50 / GBATTERYLOG00



Inductive sensor
AC 240 / GINDUCTONO000



Internal LED lights
AC 770 (advised 2 pcs) / GLTSWIFINO000



5 m LED strip
AC 800 / GLTLED5000W00



Remote control, rolling code 2 ch.
KEEP 2 RC / GKKEEP2STNOB00



Kit 5 Remote control, rolling code 2 ch.
KITVICTOR / GVCTR2STNSC00



Key operated switch
INDEX / GINDEXSTNOB00



Digital switch with radio-controller keypad
TACT RADIO / GTACTRADNOB00



Extruded aluminium column h 50 cm
MAST 50 / GMAST005NOG00



Extruded aluminium column h 1 m for 2 photocells and control accessories
MAST TWIN 100 / GMASTT10NOG00

SAFETY ACCESSORIES from page 244 to 251



Flashing signal lights
SWIFT YELLOW / GSWIFTSTLYB00
SWIFT WHITE / GSWIFTSTLWB00



Photocells
DART / GDARTSTNOB00



2 m curtain
AC 590 / GLTHEDGE02W00



Reflective adhesive strips
AC 660 / GLTSTRIP00W00



Signage table
AC 40 / GSAFETYNOG00