





Barrier gates

# LIMIT 600 DUAL

24V Electromechanical barrier raising systems with encoder for residential, industrial or public use. For entrance up to 6 meters

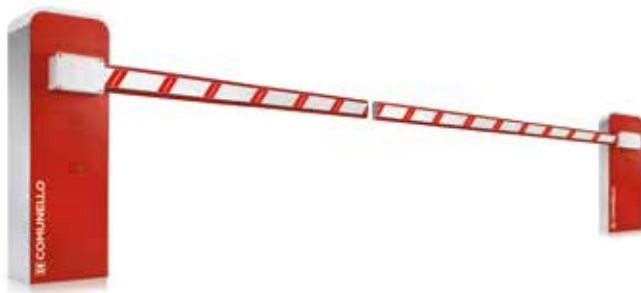


## TECHNICAL CHARACTERISTICS

Electrical information	24V
Power supply	230 VAC
Operating power supply	24 VDC
Power consumption	150 W
Current input	6,2 A
Torque	100 Nm
Duty cycle	intensive use
Protection rating (IP)	IP44
Insulation class	2
Working temperature	-20°C / +50°C

ARTICLE	COLOUR	CODE	DESCRIPTION	PACKAGE	WEIGHT	PALETTE
<b>LIMIT 600 24V</b>		GLT060EEL0R00	Barrier built-in control board 24V For entrance up to 6 m	1 pcs.	65 kg	6

## BAR ASSEMBLY AND SPRING CHOICE

BAR ASSEMBLY AND SPRING CHOICE	LENGTH									
	2,00	2,50	3,00	3,50	4,00	4,50	5,00	5,50	6,00	
Bar	●	●	●	●	●	●	●	●	●	
Bar with bar cover kit	●	●	●	●	●	●	●	●	●	
Bar with bar cover kit and lights	●	●	●	●	●	●	●	●	●	
Bar with swing down support	●	●	●	●	●	●	●	●	●	
Bar with bar cover kit and swing down support	●	●	●	●	●	●	●	●	●	
Bar with bar cover kit, led and swing down support	●	●	●	●	●	●	●	●	●	
Bar with curtain	●	●	●	●	●	●	●	●	●	
Bar with upper bar cover and curtain	●	●	●	●	●	●	●	●	●	
Bar with upper bar cover, led and curtain	●	●	●	●	●	●	●	●	●	
Bar with upper bar cover, led, curtain and swing down support	●	●	●	●	●	●	●	●	●	
● Small spring AC 530   ● Medium spring AC 540   ● Double spring AC 550										

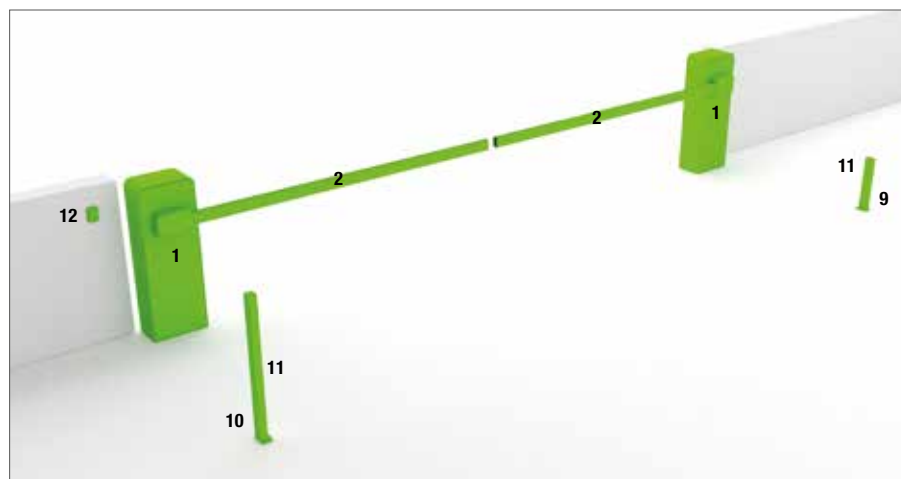

## INSTALLATION CHART

- 2 LIMIT 600** - GLT060EEL0B00  
Barrier 24V, built-in control board
- 2 AC 655 - 6 m** - GLTBAR6000W00  
Aluminium rectangular bar, RAL 9010
- 3 AC 510** - GLTANCH080G00  
Foundation kit
- 2 AC 550 (heavy)** / GLTSPRINGT000  
spring
- 2 AC 695** - GLTTOPP600R00  
Red barrier bar cover, 6 m
- 2 AC 560** - GLTFIX0000A00  
Arm nesting post
- 2 AC 700** - GLTSTOPPERW00  
Bar end plug
- 2 AC 710** - GLTPLUG010W00  
Bar end plug
- 1 MAST 50** - GMAST005N0G00  
Extruded aluminium column h 50 cm
- 1 MAST TWIN 100** - GMAST005N0G00  
Extruded aluminium column h 1 meter for photocells and control accessories installation
- 11 DART** - GDARTSTDN0B00  
Photocells
- 1 INDEX** - GINDEXSTN0B00  
Key operated switch
- 1 AC-50** - GBATTERYLOG00  
Battery kit
- 4 AC 800** - GLTLED5000W00  
5 m LED strip
- 6 AC 770** - GLTSWIFTN0G00  
Internal LED lights
- 2 AC 570** - GLTSUPPORTG00  
Swing down support mobile
- 2 AC 660** - GLTSTRIP00W00  
Reflective adhesive strips

### LIMIT 600 DUAL

#### ACCESSORIES from page 198 to 205



Outdoor antenna  
AC 30 / GANTENNANOG00



Foundation kit  
AC 510 / GLTANCH080G00



Spring for light bar  
AC 530 (light) / GLTSPRINGMG00  
AC 540 (medium) / GLTSPRINGHG00  
AC 550 (heavy) / GLTSPRINGTG00



Aluminium rectangular bar, RAL 9010  
AC 655 - 6m / GLTBAR6000W00



Bar end plug  
AC 700 / GLTSTOPPERW00



Bar end plug  
AC 715 / GLTPLUG020W00



Bar end plug  
AC 710 / GLTPLUG010W00



Red barrier bar cover  
AC 695 - 6m / GLTOPP600R00



90° jointed rod  
AC 580 / GLTANG9000G00



Swing down support for bar  
AC 570 / GLTSUPPORTG00

Barrier gates

#### CONTROL ACCESSORIES from page 208 to 243



Battery kit  
AC 50 / GBATTERYLOG00



Inductive sensor  
AC 240 / GINDUCTONOG00



Internal LED lights  
AC 770 (adhesed 2 pcs) / GLTSWIFINO00



5 m LED strip  
AC 800 / GLTLED5000W00



Remote control, rolling code 2 ch.  
KEEP 2 RC / GKKEEP2STN0B00



Kit 5 Remote control, rolling code 2 ch.  
KITVICTOR / GVCTR2STN5C00



Key operated switch  
INDEX / GINDEXSTN0B00



Digital switch with radio-controller keypad  
TACT RADIO / GTACTRADNOB00



Extruded aluminium column h 50 cm  
MAST 50 / GMAST005N0G00



Extruded aluminium column h 1 m for 2 photocells and control accessories  
MAST TWIN 100 / GMASTT10N0G00

#### SAFETY ACCESSORIES from page 244 to 251



Flashing signal lights  
SWIFT YELLOW / GSWIFTSTLYB00  
SWIFT WHITE / GSWIFTSTLWB00



Photocells  
DART / GDARTSTDN0B00



2 m curtain  
AC 590 / GLTHEDGE02W00



Reflective adhesive strips  
AC 660 / GLTSTRIP00W00



Signage table  
AC 40 / GSAFETYTN0G00