




Barrier gates


# LIMIT 800 DUAL

24V Electromechanical double barrier raising systems with encoder for residential, industrial or public use For entrance up to 8 m

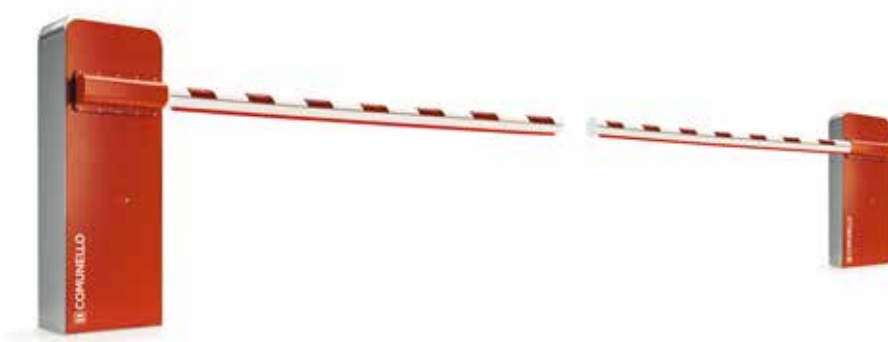

## TECHNICAL CHARACTERISTICS

Electrical information	LIMIT 800
Power supply	230 VAC
Operating power supply	24 VDC
Power consumption	150 W
Current input	6,2 A
Torque	100 Nm
Duty cycle	40%
Protection rating (IP)	IP44
Insulation class	2
Working temperature	-20°C / +50°C



ARTICLE	COLOUR	CODE	DESCRIPTION	PACKAGE	WEIGHT	PALETTE
■ LIMIT 800 24V	■	GLT080EEL0R00	Barrier with built-in control board 24V For entrance up to 8 m	1 pcs.	95 kg	6

## BAR ASSEMBLY AND SPRING CHOICE

	LENGTH				
	6,00	6,50	7,00	7,50	8,00
Bar with joint, plug	●	●	●	●	●
Bar with joint, plug and lights	●	●	●	●	●
Bar with joint, plug and red barrier bar cover	●	●	●	●	●
Bar with joint, plug, red barrier bar cover and lights	●	●	●	●	●
Bar with joint, plug and swing down support	●	●	●	●	●
Bar with joint, plug, swing down support and lights	●	●	●	●	●
Bar with joint, plug, swing down support, lights and red barrier bar cover	●	●	●	●	●
Bar with joint, plug and curtain	●	●	●	●	●
Bar with joint, plug, curtain and lights	●	●	●	●	●
Bar with joint, plug, curtain, lights and swing down support	●	●	●	●	●

● Double spring AC 550



## INSTALLATION CHART

- 2 LIMIT 800 DUAL - GLT080EEL0R00  
Barrier with built-in control board 24V veloce
- 4 AC 741 - 4 m - GLTBA40TOW00  
Circular barrier white RAL 9010
- 4 AC 681 - GBRTOPP400R00  
Red barrier bar cover, 4 m
- 2 AC 510 - GLTANCH080G00  
Foundation kit
- 1 AC 550 - GLTSPRINGHG00  
Spring for light bar
- 1 MAST 50 - GMAST005N0G00  
Extruded aluminium column h 50 cm
- 1 MAST TWIN 100 - GMAST005N0G00  
Extruded aluminium column h 1 meter for photocells and control accessories installation
- 2 DART - GDARTSTDNOB00  
Photocells per esterno
- 1 INDEX - GINDEXSTNOB00  
Key operated switch
- 1 AC-50 - GBATTERYLOG00  
Battery kit
- 4 AC 800 - GLTLED5000W00  
5 m LED strip
- 2 AC 770 - GLTSWIFTN0G00  
Internal LED lights
- 2 AC 560 - GLTFIX0000A00  
Arm nesting post
- 2 AC 660 - GLTSTRIP00OW00  
Reflective adhesive strips

### LIMIT 800 DUAL

#### ACCESSORIES from page 198 to 205



Outdoor antenna  
AC 30 / GANTENNANO000



Foundation kit  
AC 510 / GLTANCH080G00



Spring for light bar  
AC 550 (heavy) / GLTSPRING000



Bar end plug  
AC 700 / GLTSTOPPERW00



Circular barrier white RAL 9010  
AC 731 -3m / GLTBAR30TOW00  
AC 741 -4m / GLTBAR40TOW00  
AC 751 -5m / GLTBAR50TOW00



Round bar joint  
AC 765 / GLTJOINT000



Red barrier bar cover  
AC 690 - 5m / GLTTOPP500R00



Swing down support for bar  
AC 570 / GLTSUPPORTG00



Round bar plug  
AC 719 / GLTPLUG040W00

Barrier gates

#### CONTROL ACCESSORIES from page 208 to 243



Battery kit  
AC 50 / GBATTERYLOG00



Inductive sensor  
AC 240 / GINDUCTON000



Internal LED lights  
AC 770 (advised 2 pcs) / GLTSWFIN000



8 m LED strip  
AC 778 / GLTLED80TOW00



Remote control, rolling code 2 ch.  
KEEP 2 RC / GKEEP2STN0B00



Kit 5 remote control, rolling code 2 ch.  
KITVICTOR / GVCTR2STN5C00



Key operated switch  
INDEX / GINDEXSTN0B00



Digital switch with radio-controller keypad  
TACT RADIO / GTACTRADN0B00



Extruded aluminium column h 50 cm  
MAST 50 / GMAST005N0G00



Extruded aluminium column h 1 m for 2 photocells and control accessories  
MAST TWIN 100 / GMASTT10N0G00

#### SAFETY ACCESSORIES from page 244 to 251



Flashing signal lights  
SWIFT YELLOW / GSWIFTSTLYB00  
SWIFT WHITE / GSWIFTSTLWB00



Photocells  
DART / GDARTSTDN0B00



2 m curtain  
AC 590 / GLTHEDGE02W00



Reflective adhesive strips  
AC 660-30 pcs / GLTSTRIP00W00



Signage table  
AC 40 / GSAFETYTN0G00