

CONDOR 220/350

Automation for swing gates
24 Vdc and 230 Vac

Life
made
easy



CONDOR 220/350

Technical features




Die-cast aluminium motor support with easily accessible onboard control unit

Manual unlocking system with key and aluminium handle

Anti-shearing arm in die-cast alloy



Every single product is duly tested at the end of each assembly line

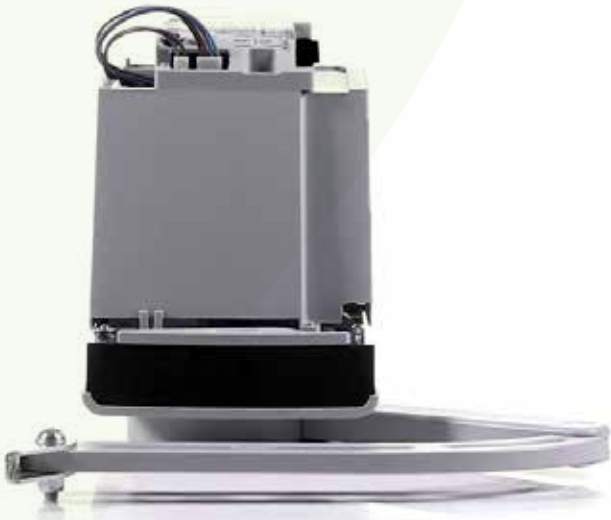

CONDOR 220

up to 2,2 m

24V


230V

CONDOR 350

up to 3,5 m

24V

DIMENSIONS (mm)

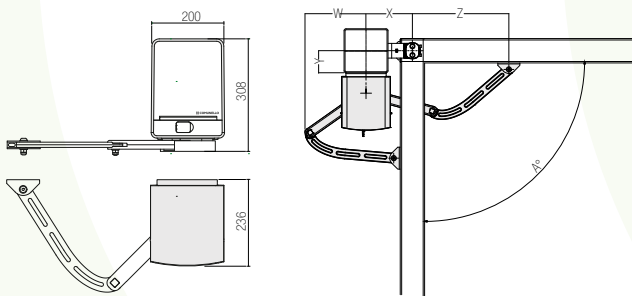


A°	X	Y	Z	W
90°	205	0	415	209
90°	190	50	415	135
90°	185	100	395	159,5
90°	170	150	372	278
110°	250	0	365	287


TECHNICAL FEATURES

	CONDOR 220 24 V	CONDOR 220 230 V	CONDOR 350 24V
Power supply	230 ~ 50 Hz		
Operator power supply	24V \equiv ONE 24V \equiv	230V ~	24V \equiv ONE 24V \equiv
Power consumption	110 W	280 W	150 W
Current input	5 A	1,2 A	6,5 A
Torque	150 Nm	250 Nm	200 Nm
Duty cycle	Intensive use	30%	Intensive use
Protection rating	IP 44		
Insulation class	2 earth	1 earth	2
Working temperature	-20°C / +50°C		
Speed	0,10 rad/s		
Weight	10 Kg	10 Kg	10 Kg

OPERATING LIMITS CONDOR 220

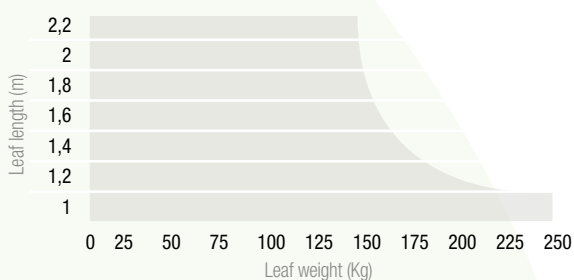

OPERATING LIMITS CONDOR 350

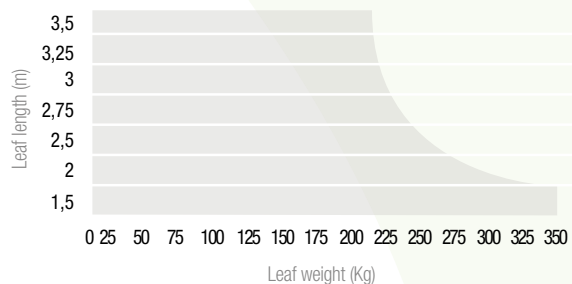

OFFICIAL DEALER:



AUTOMATION FOR GATES, DOORS AND BARRIERS

FRATELLI COMUNELLO S.P.A.

HEADQUARTERS

Via Zarpellon, 33
36027 San Giuseppe di Cassola, Vicenza, Italy
Tel. +39 0424 585111 Fax +39 0424 533417
info@comunello.it www.comunello.com

REGISTERED OFFICE

Via Cassola,64 - C.P.79
36027 Rosà, Vicenza, Italy
Tel. +39 0424 585111 Fax +39 0424 533417
info@comunello.it www.comunello.com