

CONDOR 500 S

AUTOMATION
FOR SWING GATES
24 VDC AND 230 VAC

Life
made
easy



CONDOR 500 S

Technical features




Easily accessible onboard control unit with integrated receiver

Fixing bracket in painted steel



Every single product is duly tested at the end of each assembly line


DIMENSIONS (mm)

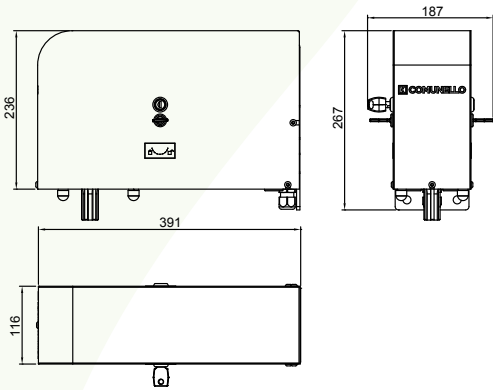

Technical features

	CONDOR 500 S 24V	CONDOR 500 S 230V
Voltage	24 VDC	230 VAC 50 Hz
Power consumption	150 W	280 W
Max. absorption	6,5 A	1,2 A
Max. thrust	330 Nm	440 Nm
Duty cycle	Intensive use	40%
Protection degree (IP)	IP44	IP44
Insulation class	1(earthing)	1(earthing)
Working temperature	-20°C / +50°C	-20°C / +50°C
No-load speed	0,15 rad/sec	0,1 rad/sec
Weight	12 kg	15,7 kg

OPERATING LIMITS CONDOR 500 S

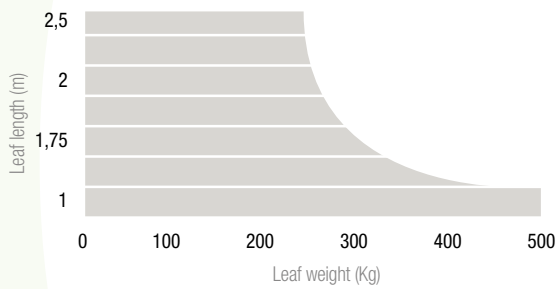


CONDOR 500 S
up to 2,5 m


24V **230V**

AC-102-103-104


Ambidextrous arms in painted steel with locking system



L = 385mm + 330mm



L = 503mm + 430mm



L = 238mm + 620mm

OFFICIAL DEALER:



AUTOMATION FOR GATES, DOORS AND BARRIERS

FRATELLI COMUNELLO S.P.A.

HEADQUARTERS

Via Zarpellon, 33

36027 San Giuseppe di Cassola, Vicenza, Italy

Tel. +39 0424 585111 Fax +39 0424 533417

info@comunello.it www.comunello.com

REGISTERED OFFICE

Via Cassola,64 - C.P.79

36027 Rosà, Vicenza, Italy

Tel. +39 0424 585111 Fax +39 0424 533417

info@comunello.it www.comunello.com