

SALIENT

Electromechanical actuators for
projecting and non-projecting
up-and-over garage doors.
24 Vdc and 230 Vac

Life
made
easy



SALIENT

Technical features



Built-in led courtesy light

Gearbox with perfectly matched metal gears to ensure efficiency, precision, silence and reliability

Manual release with integrated aluminum lever



Output shaft available in round section versions with knurling and square section




Onboard control unit with integrated receiver

Encoder version available (24Vdc)



Every single product is duly tested at the end of each assembly line

DIMENSIONS (mm)

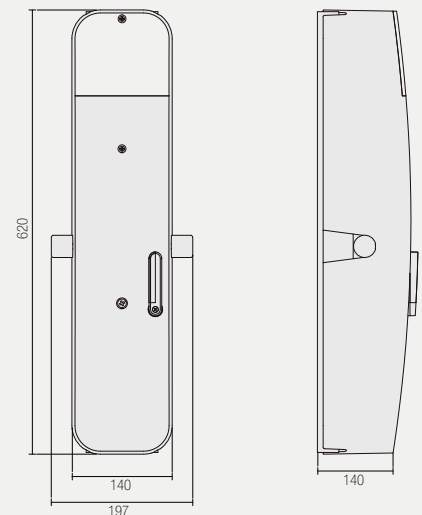

Technical features

	SALIENT 24V	SALIENT 230V FAST	SALIENT 230V SLOW
Power supply	230 VAC	230 VAC	230 VAC
Motor power supply	24 VDC	230 VAC	230 VAC
Current input	150 W	280 W	280 W
Power consumption	6,5 A	1,2 A	1,2 A
Torque	330 Nm	440 Nm	440 Nm
Duty cycle	Intensive use	40%	40%
Protection rating (IP)	IP24D	IP24D	IP24D
Insulation class	2	1 (earthing)	1 (earthing)
Working temperature	-20°C / +50°C	-20°C / +50°C	-20°C / +50°C
Speed	1,7 rpm	1,7 rpm	1,2 rpm
Weight	11,2 Kg	11,4 Kg	11,4 Kg



OFFICIAL DEALER:



AUTOMATION FOR GATES, DOORS AND BARRIERS

FRATELLI COMUNELLO S.P.A.

HEADQUARTERS

Via Zarpellon, 33
36027 San Giuseppe di Cassola, Vicenza, Italy
Tel. +39 0424 585111 Fax +39 0424 533417
info@comunello.it www.comunello.com

REGISTERED OFFICE

Via Cassola,64 - C.P.79
36027 Rosà, Vicenza, Italy
Tel. +39 0424 585111 Fax +39 0424 533417
info@comunello.it www.comunello.com