

Life  
made  
easy

## SALIENT

Electromechanical actuators for  
projecting and non-projecting  
up-and-over garage doors.  
24 Vdc and 230 Vac




# SALIENT

## Technical features



Every single product is duly tested at the end of each assembly line

### DIMENSIONS (mm)

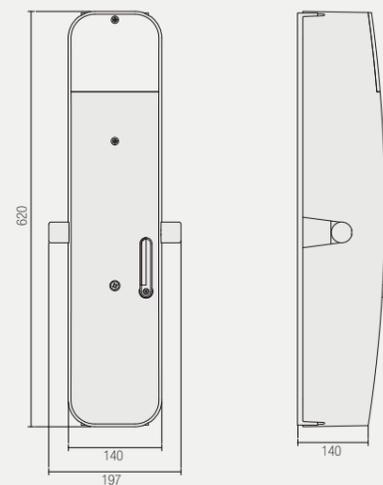

### Technical features

|                        | SALIENT 24V   | SALIENT 230V FAST | SALIENT 230V SLOW |
|------------------------|---------------|-------------------|-------------------|
| Power supply           | 230 VAC       | 230 VAC           | 230 VAC           |
| Motor power supply     | 24 VDC        | 230 VAC           | 230 VAC           |
| Current input          | 150 W         | 280 W             | 280 W             |
| Power consumption      | 6,5 A         | 1,2 A             | 1,2 A             |
| Torque                 | 330 Nm        | 440 Nm            | 440 Nm            |
| Duty cycle             | Intensive use | 40%               | 40%               |
| Protection rating (IP) | IP24D         | IP24D             | IP24D             |
| Insulation class       | 2             | 1 (earthing)      | 1 (earthing)      |
| Working temperature    | -20°C / +50°C | -20°C / +50°C     | -20°C / +50°C     |
| Speed                  | 1,7 rpm       | 1,7 rpm           | 1,2 rpm           |
| Weight                 | 11,2 Kg       | 11,4 Kg           | 11,4 Kg           |



OFFICIAL DEALER:



AUTOMATION FOR GATES, DOORS AND BARRIERS

FRATELLI COMUNELLO S.P.A.

HEADQUARTERS

Via Zarpellon, 33  
36027 San Giuseppe di Cassola, Vicenza, Italy  
Tel. +39 0424 585111 Fax +39 0424 533417  
info@comunello.it www.comunello.com

REGISTERED OFFICE

Via Cassola,64 - C.P.79  
36027 Rosà, Vicenza, Italy  
Tel. +39 0424 585111 Fax +39 0424 533417  
info@comunello.it www.comunello.com